


RF SPEC.

频率范围	插入损耗	驻波	隔离度	承载功率
DC-1000MHZ	<0.80dB	<1.50	>60dB	10W
1000-2150MHZ	<1.20dB	<1.60	>50dB	10W



性能参数		外型尺寸 (mm)	
RF 阻抗	50 ohm		
控制电压/电流:	DC12V /60mA		
	DC24V / 60mA		
切换时间	<10ms		
切换寿命	>30 万次		
切换模式	先断后和		
工作温度范围	-25 ~ +60℃		
RF 接口	F /BNC female		
重量:			

原理图

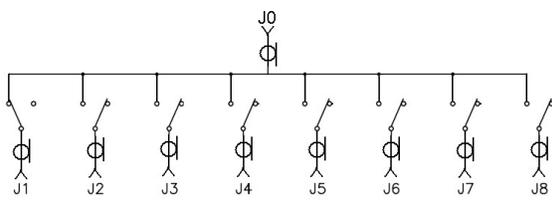

RF Patch	C2	C3	C4	C5	C6	C7	C8
J0 to J1	0	0	0	0	0	0	0
J0 to J2	+V	0	0	0	0	0	0
J0 to J3	0	+V	0	0	0	0	0
J0 to J4	0	0	+V	0	0	0	0
J0 to J5	0	0	0	+V	0	0	0
J0 to J6	0	0	0	0	+V	0	0
J0 to J7	0	0	0	0	0	+V	0
J0 to J8	0	0	0	0	0	0	+V

产品编号选择

P/N:CUS1503 -

BNC female 1 2 DC12V

F female 2 4 DC24V

CUS1503-12 (75 欧姆 SP8T 失效保护型/DC12V/DC-3GHZ/F female)
 CUS1503B-24 (75 欧姆 SP8T 失效保护型/DC24V/DC-3GHZ/BNC female)



Tel :0086-10-82087227
 Fax:0086-10-82087380

E-mail: sales@rf-switch.com
 Web site: www.rf-switch.com